


OSCILLATOR

SMD TYPE


(RoHS Compliance) HSO751S Series

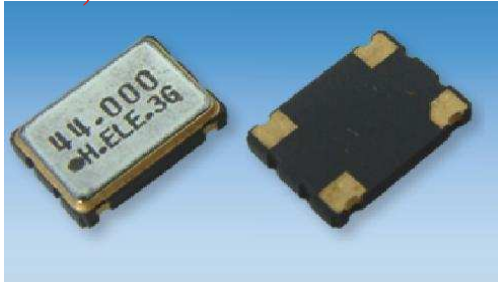


Features:

- Tri-state function.
- For applications in visual end-products,
 $\Delta f/F_o \leq \pm 30 \times 10^{-6}$ is available.

Dimension (mm):

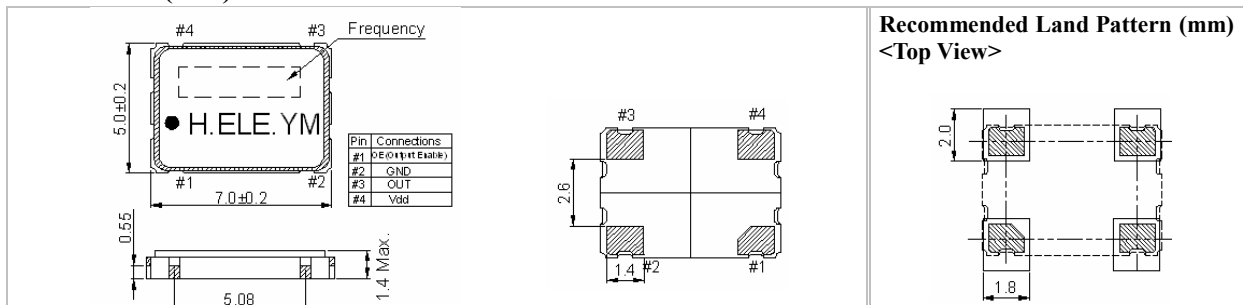

Test Circuit and Output Waveform:

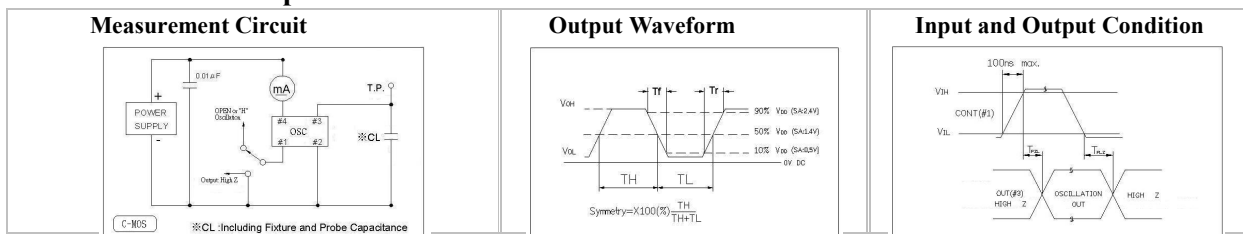

Standard Specification:

TYPE		HSO751S			
ITEM					
Frequency Range		1.8MHz ~ 160MHz			
Frequency Stability		±25ppm, ±50ppm, ±100ppm			
Option on pin 1		Pin 1 has control			
POWER voltage		+2.5 V (±10%)	+2.85 V (±10%)	+3.3 V (±10%)	+5V (±10%)
Operating Temp.		-10°C ~ +70°C			
Storage Temp.		-55°C ~ +125°C			
Out put Character	"0" Level	10%VDD max			
	"1" Level	90%VDD min			
	Rise Time (Tr)	10% ~ 90%VDD 10ns max			
	Fall Time (Tf)	90% ~ 10%VDD 10ns max			
	Symmetry	60/40 to 40/60 at 50%VDD			
Output Load		15pF, 30pF, 50pF Max.			

*Packing Unit : 1,000pcs/Reel.